

Hyper FFF™

Additive Productivity

Hyper FFF™ Is a System Engineered to Efficiently Produce Final Parts



Hardware



Software




Material



Algorithm

100% Quality, 300%+ Productivity

*Source: Raise3D

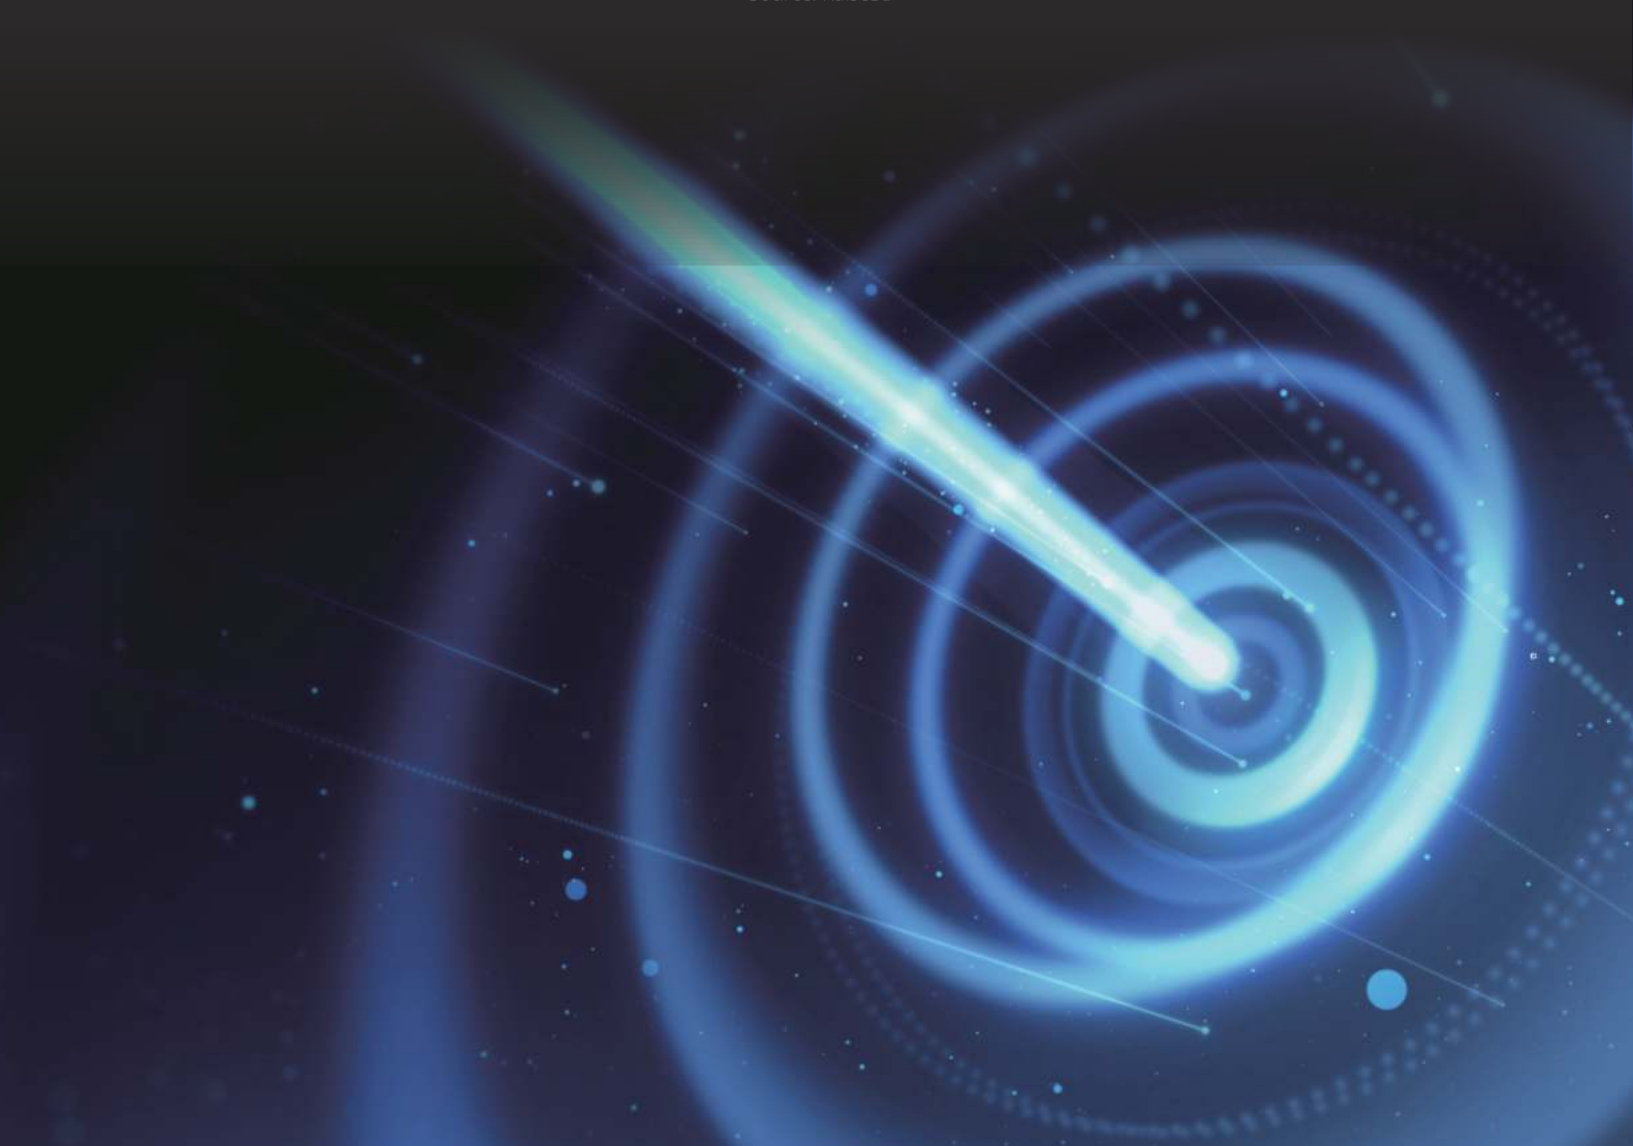

Raise3D Hyper Speed Upgrade Kit (Pro3 Series Only)

To initiate Additive Productivity for your Pro3 Series printer



100% Quality, 300%+ Productivity

*Source: Raise3D

Printing Speed



50 mm/s

350 mm/s

Acceleration



1000 mm/s²

10,000 mm/s²



2 Hyper Speed
Hot Ends 0.4mm



Hyper Speed
Auto Calibrator



Hyper Speed
PLA & ABS Filaments



Activation Letter

Product	Raise3D Hyper Speed Hot End 0.4mm (Pro3 Series Only)	Raise3D Hyper Speed Auto Calibrator (Pro3 Series Only)	Raise3D Hyper Speed PLA Filament (1.75 mm)	Raise3D Hyper Speed ABS Filament (1.75 mm)
Weight	130 g	95 g	1 kg	1 kg
Color	—	—	White	Natural
Size	117 × 80 × 73 mm	117 × 80 × 73 mm	—	—
Recommended printing temperature	—	—	220-250°C	240-270°C